


ALL-BLACK (THEATRE) DEVICES - SPECS


15 AMP STRAIGHT BLADE AND LOCKING DEVICES

INLETS & OUTLETS




A	B
2.57"	1.87"
C	D
1.70"	2.20"

PLUGS

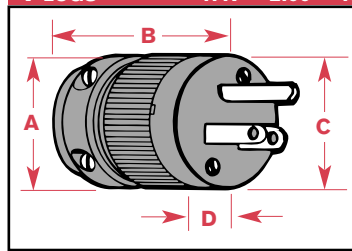

A	B	C	D
1.47"	2.00"	1.35"	.300"

CONNECTORS



A	B	C	D
1.47"	2.70"	1.35"	1.00"

AGENCY LISTINGS

Receptacles: U.L. Listed File E111198
C.S.A. Certified File LR81290
Plugs and Connectors: U.L. Listed File E57672
C.S.A. Certified File LR81290

CORD ACCOMMODATION

15 Amp Straight Blade And Locking—
Plugs & Connectors: 0.300"-.655"
20 & 30 Amp Locking—Plugs &
Connectors: 3-Wire: .275"-.780"
4 & 5 Wire - .456" - 1.150"

TERMINAL ACCOMMODATION

15 Amp Straight Blade And Locking:
#18-10
20 & 30 Amp Locking—Plugs &
Connectors: 3-Wire: #16-10
4 & 5 Wire - #12-8

ELECTRICAL

Dielectric Withstand Voltage: >3,000V
Heat Rise: Maximum 30°C after 100 cycles at
150% of rated current.
Current Interrupting: Yes.

MATERIALS

Plugs & Connectors:
Front & Rear Housing: Nylon-Tough and
resistant to a wide range of chemicals.
UL-listed for 125°C continuous use.
UL 94V-2 Flammability Index.
Cord Clamp: Nylon
Terminals & Contacts—15 & 20 Amp Str.
Blade: exclusive Perma-Lock™ lug-type ter-
minals with #8 solid brass terminals screws;
20 & 30 Amp Locking: clamp-type terminals
with #10 solid brass terminal screws.

RECEPTACLES


Face and Housing are Glass-Filled Nylon-Tough
and resistant to a wide range of chemicals:
U.L. Listed for 130°C continuous use.
U.L. 94V-O Flammability Index.
Mounting Straps, Rivets and Grounding Strip
are Solid Brass.
Terminal Clamps & Screws: #10 Solid Brass
for excellent conductivity. Can accept up to a
#6 ring terminal.
Terminals & Contacts: Clamp-type terminals -
provide superior wire holding. Rivetless, One-
Piece Contacts - eliminates joint resistance.

FLANGED INLETS & OUTLETS

Flange & Housing: Nylon
Blades (Inlet): Solid Brass
Contacts (Outlet): Solid Brass
Terminal Screws: Solid Brass
Terminal Clamps: Solid Brass
Terminal Cover: Clear Polycarbonate


20 & 30 AMP LOCKING DEVICES

PLUGS




	A	B
20 & 30A 3 WIRE	2.54"	1.84"
20 & 30A 4 & 5 WIRE	3.04"	2.11"

CONNECTORS



	A	B
20 & 30A 3 WIRE	3.55"	1.84"
20 & 30A 4 & 5 WIRE	4.10"	2.11"

INLETS & OUTLETS



	A	B
20 & 30A 3 WIRE	2.88"	2.00"
20 & 30A 4 & 5 WIRE	3.02"	1.93"
	C	D
20 & 30A 3 WIRE	.185"	120°
20 & 30A 4 & 5 WIRE	.185"	120°
	E	F
20 & 30A 3 WIRE	1.25"	2.04"
20 & 30A 4 & 5 WIRE	1.35"	2.19"