

Hubbell Twist-Lock Devices



Hubbell Twist-Lock Devices Selection Chart

NEMA Grounding Twist-lock



Poles	Wires	Amps	Volts	NEMA Code No.	AC HP Rating†	Plug	Connector Body	Inlet	Outlet	Receptacles					
						Insulgrip	Nylon	Nylon	Single	Single	IG Single	Shortstrap	Duplex	IG Duplex	
2	3	15	125	L5-15	0.5	HBL4720C*	HBL4729C*	HBL4716C	HBL4715C*	HBL4710*	IG4710*	HBL4731A	HBL4700*	IG4700*	
			260	L6-15	2	HBL4570C*	HBL4579C*	HBL4588C	HBL4585C	HBL4580*	IG4580*	HBL4563A	HBL4560	IG4560	
			277AC	L7-15	2	HBL4770C*	HBL4779C*	HBL4788C	HBL4785C	HBL4760*	HBL4760*	HBL4763A	HBL4750		
		20	125	L5-20	1	HBL2311*	HBL2313*	HBL2315*	HBL2316*	HBL2310*	IG2310*				
			260	L6-20	2	HBL2321*	HBL2323*	HBL2325*	HBL2326*	HBL2320*	IG2320*				
			277AC	L7-20	2	HBL2331*	HBL2333*	HBL2335*	HBL2336*	HBL2330*					
	30	480AC	L8-20	5	HBL2341*	HBL2343*	HBL2345*	HBL2346*	HBL2340*	IG2340					
		600AC	L9-20		HBL2351*	HBL2353*	HBL2355*	HBL2356*	HBL2350*	HBL2350*					
		125	L5-30	2	HBL2611*	HBL2613*	HBL2615*	HBL2616*	HBL2610*	IG2610*					
	3	4	20	125/250	L14-20	2(1)	HBL2411*	HBL2413*	HBL2415*	HBL2416*	HBL2410*	IG2410*			
				3Ø250AC	L15-20	5	HBL2421*	HBL2423*	HBL2425*	HBL2426*	HBL2420*	IG2420*			
				3Ø480AC	L16-20	10	HBL2431*	HBL2433*	HBL2435*	HBL2436*	HBL2430*				
30		125/250	L14-30	3(2)	HBL2711*	HBL2713*	HBL2715*	HBL2716*	HBL2710*	IG2710					
		3Ø250AC	L15-30	7.5	HBL2721*	HBL2723*	HBL2725*	HBL2726*	HBL2720*	IG2720					
		3Ø480AC	L16-30	15	HBL2731*	HBL2733*	HBL2735*	HBL2736*	HBL2730*						
3Ø600AC	L17-30		HBL2741*	HBL2743*	HBL2745*	HBL2746*	HBL2740*								
4	5	20	3ØY120/208AC	L21-20	3	HBL2511*	HBL2513*	HBL2515*	HBL2516*	HBL2510*	IG2510				
			3ØY277/480AC	L22-20	10	HBL2521*	HBL2523*	HBL2525*	HBL2526*	HBL2520*	IG2520				
			3ØY347/600AC	L23-20		HBL2531*	HBL2533*	HBL2535*	HBL2536*	HBL2530*	IG2530				
	30	3ØY120/208AC	L21-30	5	HBL2811*	HBL2813*	HBL2815*	HBL2816*	HBL2810*	IG2810					
		3ØY277/480AC	L22-30	15	HBL2821*	HBL2823*	HBL2825*	HBL2826*	HBL2820*	IG2820					
		3ØY347/600AC	L23-30		HBL2831*	HBL2833*	HBL2835*	HBL2836*	HBL2830*	IG2830					

†The Horsepower Ratings are the Phase Values. The Values in Parentheses are Phase to Neutral.
 Note: Horsepower Ratings are Applicable to Plugs and Receptacles Only and Do Not Apply to Connectors, Flanged Inlets and Outlets.
 See Full Line Catalog for Non-NEMA/Non-Grounding Devices, weatherproofing Accessories and selected corrosion resistant configurations.
 *Add 'CN' suffix for Robertson/Slot combination head screws.

See Other Side →



www.camlok.com
 1-800-CAM-LOKS
 (1-800-226-5657)
 Phone: (225) 654-0929
 Fax: (225) 654-6061
 E-mail: jcustomsupply@bellsouth.net



J Custom Supply, Inc.
 6142 Hwy 19
 P.O. Box 678
 Zachary, LA 70791


Hubbell Flanged Inlets/Receptacles Selection Chart

Inlet/Outlet Dimensions

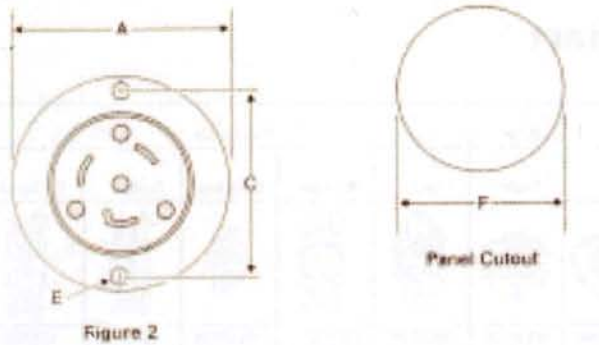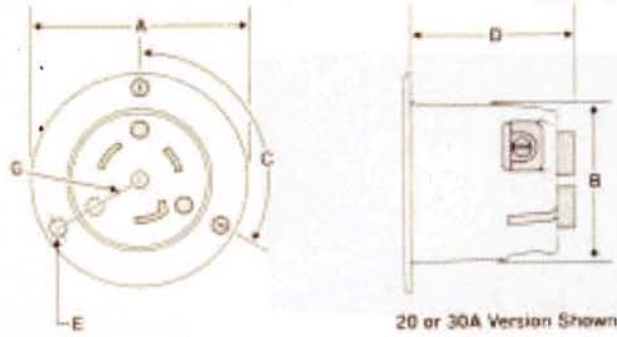

		Inlet and Outlet Dimensions						
Catalog Number	Fig.	A	B	C	D	E	F	G
HBL4716C						2 Holes		
HBL4586C		(65.1)	(42.9)	(55.6)	(43.7)	(4.0)	(44.5)	
HBL4786C	2	2 ¹ / ₁₆ "	1 ¹¹ / ₁₆ "	2 ¹ / ₁₆ "	1 ²³ / ₃₂ "	⁵ / ₁₆ "D	1 ¹ / ₂ "	-
HBL2315 HBL2325						3 Holes		
HBL2335 HBL2345		(73.0)	(52.0)		(56.4)	(4.8)	(53.0)	(31.8)
HBL2355	1	2 ⁷ / ₁₆ "	2 ¹ / ₁₆ "	120°	2 ¹¹ / ₁₆ "	³ / ₁₆ "D	2 ¹ / ₁₆ "	1 ¹ / ₄ "
HBL2415 HBL2425						3 Holes		
HBL2435 HBL2515		(77.8)	(57.2)		(31.4)	(4.8)	(58.0)	(34.1)
HBL2525 HBL2535	1	3 ¹ / ₁₆ "	2 ¹ / ₁₆ "	120°	2 ¹¹ / ₁₆ "	³ / ₁₆ "D	2 ¹ / ₁₆ "	1 ¹¹ / ₁₆ "
HBL2615 HBL2625						3 Holes		
HBL2635 HBL2645		(73.0)	(52.0)		(56.4)	(4.8)	(53.0)	(31.8)
HBL2655	1	2 ⁷ / ₁₆ "	2 ¹ / ₁₆ "	120°	2 ¹¹ / ₁₆ "	³ / ₁₆ "D	2 ¹ / ₁₆ "	1 ¹ / ₄ "
HBL2715 HBL2725						3 Holes		
HBL2735 HBL2745								
HBL2815 HBL2825		(77.8)	(57.2)		(31.4)	(4.8)	(58.0)	(34.1)
HBL2835	1	3 ¹ / ₁₆ "	2 ¹ / ₁₆ "	120°	2 ¹¹ / ₁₆ "	³ / ₁₆ "D	2 ¹ / ₁₆ "	1 ¹¹ / ₁₆ "
HBL4715C						2 Holes		
HBL4585C		(65.1)	(42.9)	(55.6)	(43.7)	(4.8)	(44.5)	
HBL4785C	2	2 ¹ / ₁₆ "	1 ¹¹ / ₁₆ "	2 ¹ / ₁₆ "	1 ²³ / ₃₂ "	³ / ₁₆ "D	1 ¹ / ₂ "	-
HBL2316 HBL2326						3 Holes		
HBL2336 HBL2346		(73.0)	(52.0)		(56.4)	(4.8)	(53.0)	(31.8)
HBL2356	1	2 ⁷ / ₁₆ "	2 ¹ / ₁₆ "	120°	2 ¹¹ / ₁₆ "	³ / ₁₆ "D	2 ¹ / ₁₆ "	1 ¹ / ₄ "
HBL2416 HBL2426						3 Holes		
HBL2436 HBL2516		(77.8)	(57.2)		(31.3)	(4.8)	(58.0)	(34.1)
HBL2526 HBL2536	1	3 ¹ / ₁₆ "	2 ¹ / ₁₆ "	120°	2 ¹¹ / ₁₆ "	³ / ₁₆ "D	2 ¹ / ₁₆ "	1 ¹¹ / ₁₆ "
HBL2616 HBL2626						3 Holes		
HBL2636 HBL2646		(73.0)	(52.0)		(56.4)	(4.8)	(53.0)	(31.8)
HBL2656	1	2 ⁷ / ₁₆ "	2 ¹ / ₁₆ "	120°	2 ¹¹ / ₁₆ "	³ / ₁₆ "D	2 ¹ / ₁₆ "	1 ¹ / ₄ "
HBL2716 HBL2726						3 Holes		
HBL2736 HBL2746								
HBL2816 HBL2826		(77.8)	(57.2)		(31.3)	(4.8)	(58.0)	(34.1)
HBL2836	1	3 ¹ / ₁₆ "	2 ¹ / ₁₆ "	120°	2 ¹¹ / ₁₆ "	³ / ₁₆ "D	2 ¹ / ₁₆ "	1 ¹¹ / ₁₆ "

Dimensions in Inches (mm)

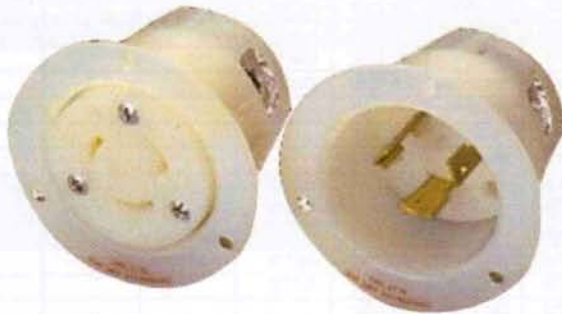

Hubbell Twist-Lock flanged receptacles and inlets fit flush on panel mounting surfaces in applications where a detachable cord is desired.

Unlike polycarbonate housings, Hubbell nylon flanges aren't susceptible to stress cracking around the mounting holes as a result of exposure to hydrocarbon environments or tightening torque.

Hubbell color coded markings provide quick, positive identification – which means fast, accurate mating of devices with identical voltage ratings. Picture window wiring facilitates proper wiring connection. Also available in the Midget line for applications where space is limited. And there's a complete line of weatherproofing accessories.

Breadth of line Performance-oriented features. Ease and convenience. That's what Hubbell Twist-Lock flanged inlets and receptacles are all about.

We Carry A Full Line Of Hubbell Twist-Lock Devices

www.camlok.com
 1-800-CAM-LOKS
 (1-800-226-5657)
 Phone: (225) 654-0929
 Fax: (225) 654-6061
 E-mail: jcustomsupply@bellsouth.net

J Custom
 Supply
 Inc

J Custom Supply, Inc
 6142 Hwy 19
 P.O. Box 678
 Zachary, LA 70791