

product specifications for: CLS 40 Panel Mounts

Item #: CLS40FRSB

Description

CAM CLS 40 1-1/8" threaded stud Female Panel Mount

Electrical Specifications

Max. Amperage: 400A

Max. Voltage: 600V AC/DC

Material Specifications

Housing Material: Santoprene TPV

Contact Material: Brass


Temperature Rating: -40°C to 105°C

Mechanical Specification

Gender: Female

Connection Type: 1/2"-13 X 1.125" threaded stud
(Torque to 25 ft.-lbs., do not over tighten)

Mounting: Brass eyelet for #10-32 bolt
(Bolts Not Provided)


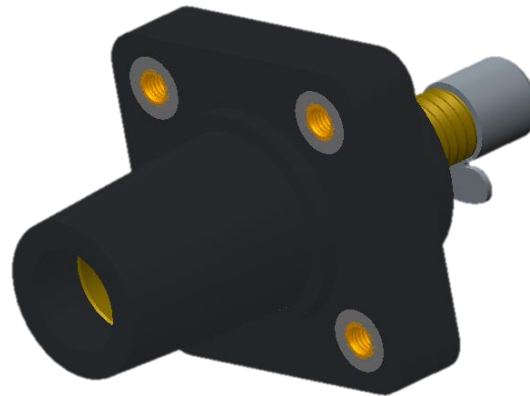


Standards and Certifications

UL Listed: File E111198

Environmental Rating: Type 3R & 4

Example: CLS40FRSB + **A** = CLS40FRSB-A

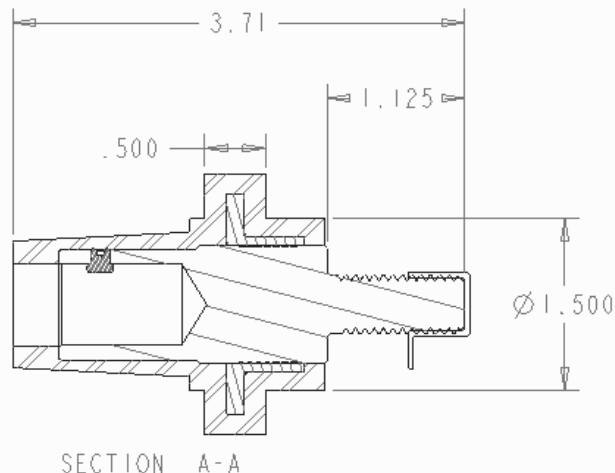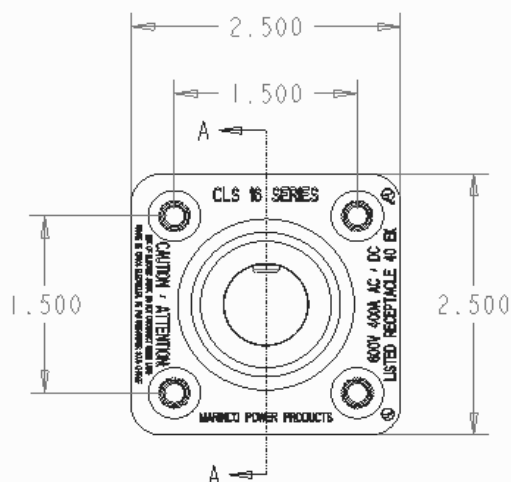

product specifications for:

CLS 40 Panel Mounts

Item #: CLS40MRSB

Description

CAM CLS 40 1-1/8" threaded stud Male Panel Mount

Electrical Specifications

Max. Amperage: 400A

Max. Voltage: 600V AC/DC

Material Specifications

Housing Material: Santoprene TPV

Contact Material: Brass

Temperature Rating: -40°C to 105°C

Mechanical Specification

Gender: Male


Connection Type: 1/2"-13 X 1.125" threaded stud

(Torque to 25 ft.-lbs., do not over tighten)

Mounting: Brass eyelet for #10-32 bolt

(Bolts Not Provided)

Optional drilled out version (X) for #10-32 nut and bolt


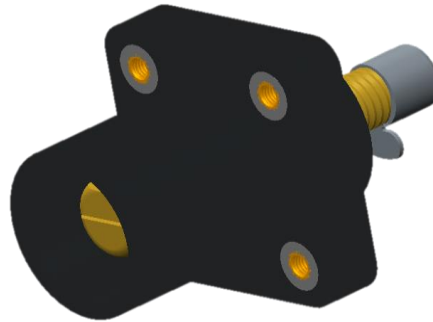


Standards and Certifications

UL Listed: File E111198

Environmental Rating: Type 3R & 4

Example: CLS40MRSB + **A** = CLS40MRSB-A

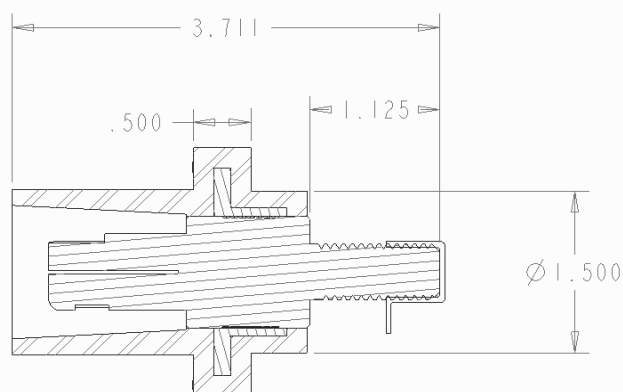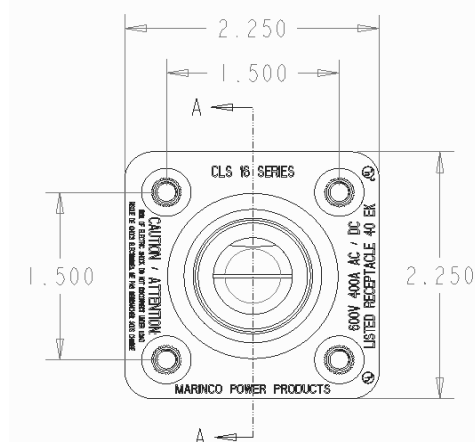

toll free 800.307.6702 | marincopowerproducts.com

©2015 Maringo Power Products. All rights reserved.

MARINCO
power products